2 Gang Dimmer Module

PLTR-WIFI-D02-TRIAC-2C




Main Features

- Work with Amazon Alexa/Echo Dot, Google Home & IFTTT.
- Manage your devices via your mobile phone or voice control.
- Create multiple schedules to turn on/off your lights.

The 2 gang Wi-Fi dimmer module reserves the access of manual override function for the end-user to switch on/off, or adjust the light level by 2 gang push-switch. App control is synchronized with the manual switch.

Product type	2 Gang Dimmer Module
Protocol	WIFI / Bluetooth
Voltage	220-240V AC 50-60Hz
Max. load	2*100W for LED lamp
WiFi frequency	2.4GHz - 2.4835GHz WIFI
Operation temp.	-10°C - +40°C
Case temp.	Tc: +80°C (Max.)
Operation range	≤ 200 m
Dims (WxDxH)	46x46x18 mm
IP rating	IP20
Warranty	3 years
Dimming type	Trailing Edge



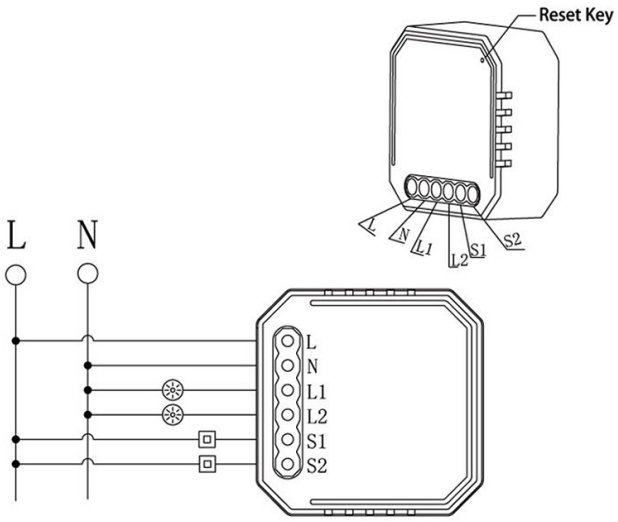

EMC Standard (EMC)

EN 300 328 V2.1.1 (2016-11),

EN 301489-1 V2.1.1 (2017-02),

EN 301489-17 V3.1.1 (2017-02),

EN 62311:2008,

EN 55015:2013+A1:2015,

EN 61547:2009

RoHS Standard (RoHS)

2011/65/EU, (EU) 2015/683

Radio Equipment (RED)

ETSI EN 300 328 V2.1.1 (2016-11)

Safety Standard (LVD)

IEC 60669-2-1:2002/AMD1:2008/

AMD2:2015, IEC 60669-1:1998/

AMD1:1999/AMD2:2006,


EN 60669-2-1:2004+A1: 2009+ A2:2010,

EN 60669-1:2018

RoHS CE

Support

Mounting bracket is more convenient to install inside the switch.

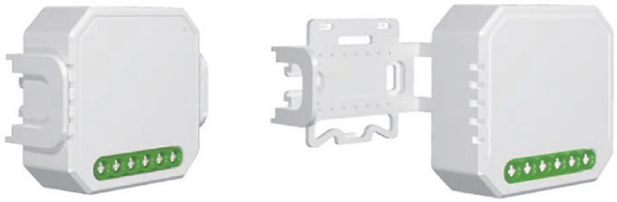

Control switch via Bluetooth/wifi :





App Control

Traditional Switch

Google home

Amazon Alexa