POLSKI LED

High-Temperature Resistant Flex LED Strip;



- High CRI, CRI>90;
- High efficiency, up to 100lm/w;
- 3 years warranty@ta≦60°C;
- 2 years warranty@ta≦80°C;
- IP68 Waterproof. Apply to bathroom， sauna.


•FH05W-P8-G1 28LX9x 24V60S W08L05

TECHNICAL DETAILS


Product No.	FH05W-P8-G1 28LX9x 24V60S W08L05
Power	4.8W/M 1.46W/ft
Voltage	DC24V
CRI	90
Led Qty	60LEDs/M
Length/Reel	5M
Working Temperature	-20~60°C
Storage Temperature	-30~80°C
Voltage Range	23 ~25V dc
Reverse Voltage	25V dc

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




C0 PLANE ISOLUX DIAGRAM (UNIT:lx)



LUMENS PER METER

Color Temperature	
2400K	308lm
2700K	345lm
3000K	356lm
4000K	389lm
6000K	367lm

DIMENSION

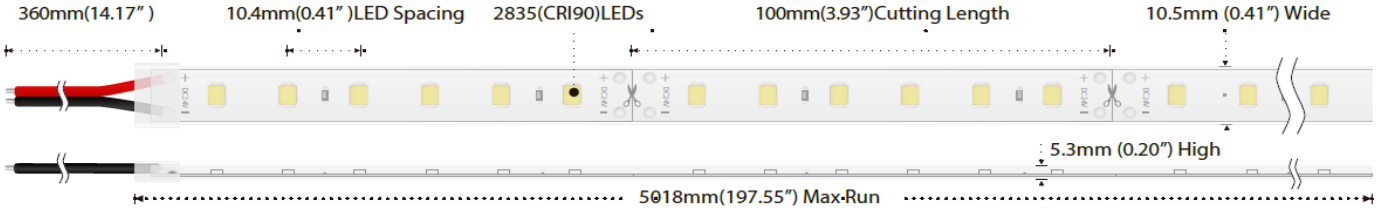

ACCESSORIES SPECIFICATION

Name	Quantity
❶ Cap	5pc
❷ Clips	10pc
❸ Screw	10pc
❹ Glue	1pc
❺ Glue nozle	1pc




POWER CONNECTION DIAGRAM

POLSKI LED



Switch Power Supply Light Strip

INSTALL

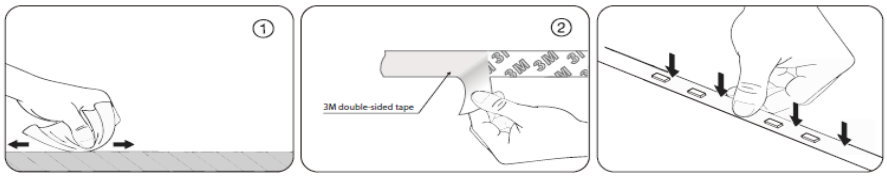

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

*Please refer to the installation manual for details